

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification⁶:

D04H 1/46, B01D 39/16

A2

(11) International Publication Number:

WO 95/05501

(43) International Publication Date:

23 February 1995 (23.02.95)

(21) International Application Number: PCT/US94/09275

(22) International Filing Date: 17 August 1994 (17.08.94)

(30) Priority Data:

08/107,517

17 August 1993 (17.08.93)

US

(71) Applicant: MINNESOTA MINING AND MANUFACTURING COMPANY [US/US]; 3M Center, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(72) Inventors: ANGADJIVAND, Seyed, A.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). JONES, Marvin, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US). MEYER, Daniel, E.; P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(74) Agents: TRUESDALE, Carole et al.; Office of Intellectual Property Counsel, Minnesota Mining and Manufacturing Company, P.O. Box 33427, Saint Paul, MN 55133-3427 (US).

(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, ES, FI, GB, GE, HU, JP, KE, KG, KP, KR, KZ, LK, LT, LU, LV, MD, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SI, SK, TJ, TT, UA, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD).


Published

Without international search report and to be republished upon receipt of that report.

(54) Title: METHOD OF CHARGING ELECTRET FILTER MEDIA

(57) Abstract

A method of charging a nonwoven web of thermoplastic microfibers to provide electret filter media is provided. The method includes impinging on a nonwoven web of thermoplastic nonconductive microfibers capable of having a high quantity of trapped charge jets of water or a stream of water droplets at a pressure sufficient to provide the web with filtration enhancing electret charge and drying said web.

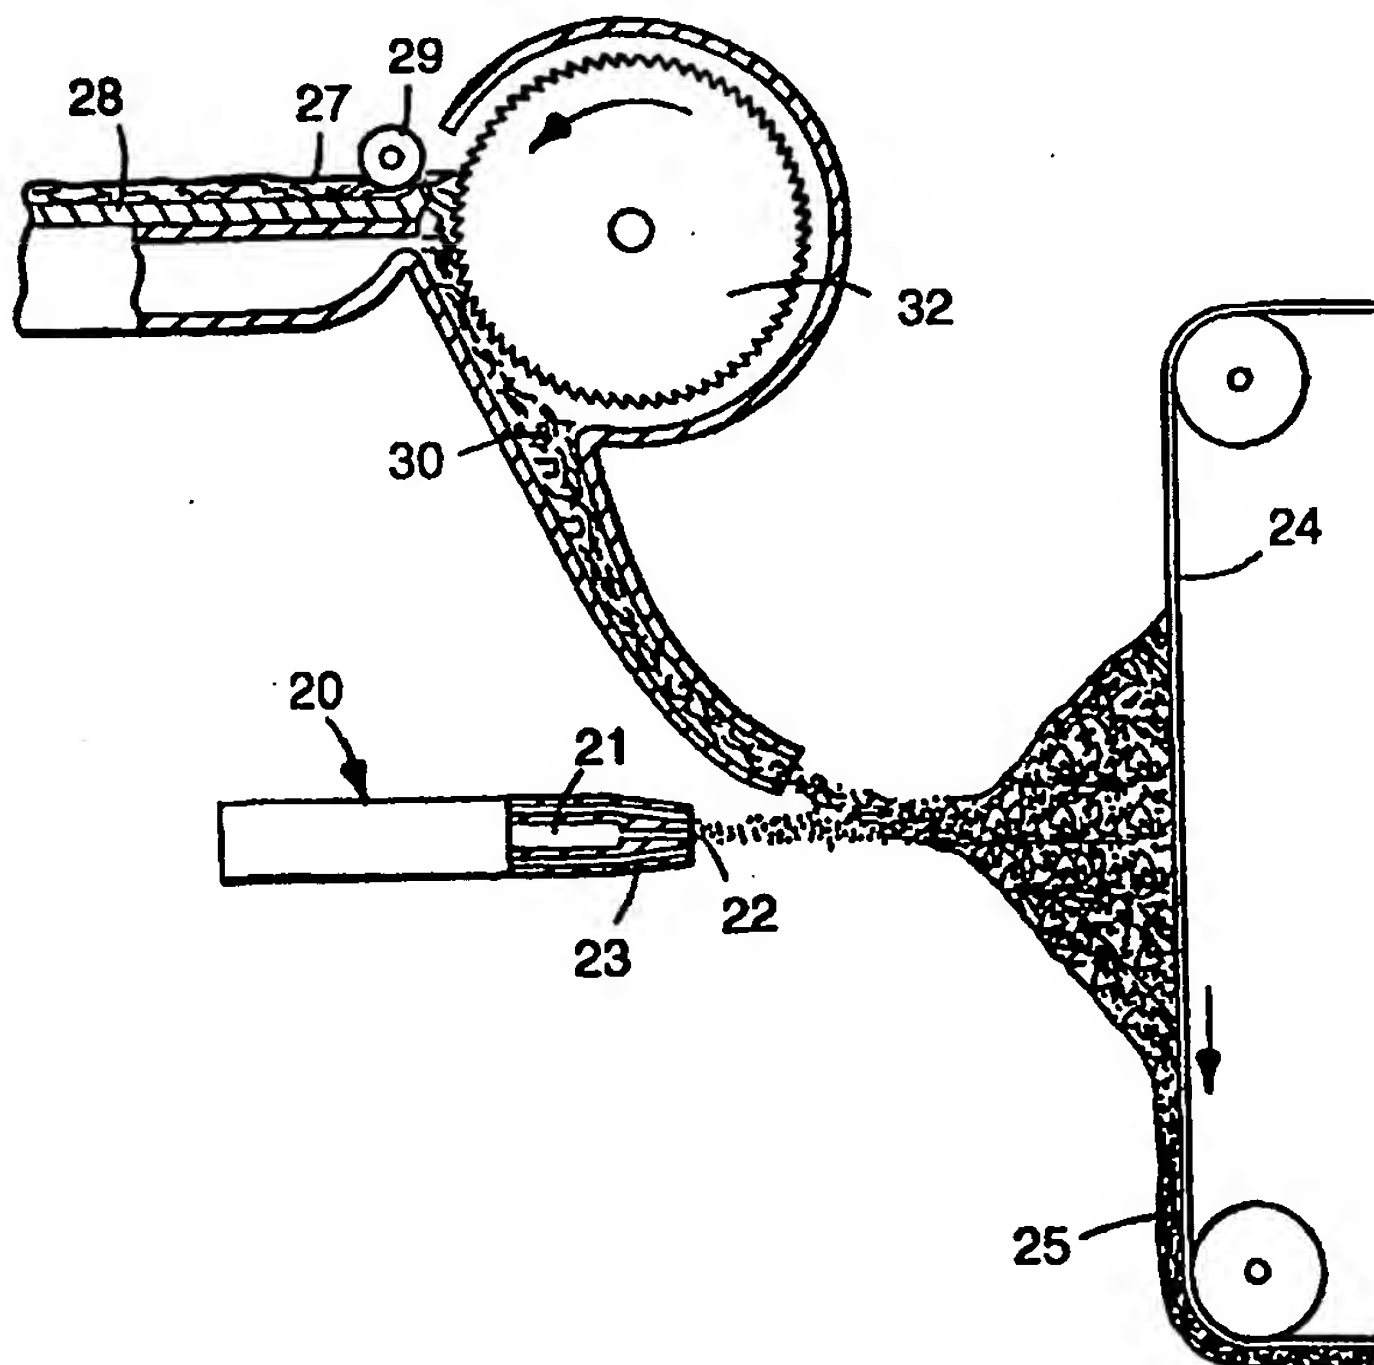

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

METHOD OF CHARGING ELECTRET FILTER MEDIA

FIELD OF THE INVENTION

The invention concerns electret-enhanced filter media (more simply
5 called "electret filters") made of fibers such as melt-blown microfibers. The
invention concerns an improved method for making fibrous electret filters for
removing particulate matter from air. The invention is especially concerned
with respirators and improving the level of filtration-enhancing electrostatic
charges on the filter media.

10

DESCRIPTION OF THE RELATED ART

For many years nonwoven fibrous filter webs have been made from
polypropylene using melt-blowing apparatus of the type described in Report No.
4364 of the Naval Research Laboratories, published May 25, 1954, entitled
15 "Manufacture of Super Fine Organic Fibers" by Van A. Wente et al. Such
melt-blown microfiber webs continue to be in widespread use for filtering
particulate contaminants, e.g., as face masks and as water filters, and for other
purposes, e.g., as a sorbent web to remove oil from water, acoustic insulation
and thermal insulation.

20 The filtration quality of a melt-blown microfiber web can be improved
by a factor of two or more when the melt-blown fibers are bombarded as they
issue from the die orifices with electrically charged particles such as electrons
or ions, thus making the fibrous web an electret. Similarly, the web can be
made an electret by exposure to a corona after it is collected. Melt-blown
25 polypropylene microfibers are especially useful, while other polymers may also
be used such as polycarbonates and polyhalocarbons that may be melt-blown
and have appropriate volume-resistivities under expected environmental
conditions.

Fibrous filters for removing particulate contaminants from the air are
30 also made from fibrillated polypropylene films. Electret filtration enhancement
can be provided by electrostatically charging the film before it is fibrillated.

Common polymers such as polyesters, polycarbonates, etc. can be treated to produce highly charged electrets but these charges are usually short-lived especially under humid conditions. The electret structures may be films or sheets which find applications as the electrostatic element in electro-acoustic devices such as microphones, headphones and speakers, in dust particle control, high voltage electrostatic generators, electrostatic recorders and other applications.

SUMMARY OF THE INVENTION

10 In one aspect, the present invention provides a method of charging a nonwoven web of thermoplastic microfibers to provide electret filter media comprising impinging on a nonwoven web of thermoplastic nonconductive microfibers capable of having a high quantity of trapped charge jets of water or a stream of water droplets at a pressure sufficient to provide the web with
15 filtration enhancing electric charge and drying said web. Surprisingly, it has been found that merely by impinging these jets of water or stream of water droplets onto the nonwoven microfiber web, the web develops filtration enhancing electret charge. The charging can be further enhanced by subjecting the web to corona discharge treatment prior to impingement by the water.
20 Preferably, the web is formed from melt blown polypropylene microfibers, poly(4-methyl-1-pentene) microfibers or blends thereof. The term "hydrocharging" will be used herein to describe this method.

The webs appear to be charged after impingement by jets of water or a stream of water droplets because when a hydrocharged web is exposed to
25 unfiltered x-ray radiation, the filtration efficiency is markedly reduced.

The fibrous electret filter produced by the method of the present invention is especially useful as an air filter element of a respirator such as a face mask or for such purposes as home and industrial air-conditioners, air cleaners, vacuum cleaners, medical air line filters, and air conditioning systems
30 for vehicles and common equipment such as computers, computer disk drives and electronic equipment. In respirator uses, the electret filters may be in the

form of molded or folded half-face masks, replaceable cartridges or canisters, or prefilters. In such uses, an air filter element produced by the method of the invention is surprisingly effective for removing particulate aerosols. When used as an air filter, such as in a respirator, the electret filter media has surprisingly
5 better filtration performance than does a comparable electret filter charged by known methods.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a side view of an apparatus useful in making the nonwoven
10 microfiber web used in the method of the present invention.

FIG. 2 is a perspective view of a water jet spray apparatus useful in the present invention.

FIG. 3 is a perspective view of a nebulizer useful in the present invention.

15 FIG. 4 is a perspective view of a pump action sprayer useful in the present invention.

DETAILED DESCRIPTION OF THE INVENTION

The melt blown microfibers useful in the present invention can be
20 prepared as described in Van A. Went, "Superfine Thermoplastic Fibers," Industrial Engineering Chemistry, vol. 48, pp. 1342-1346 and in Report No. 4364 of the Naval Research Laboratories, published May 25, 1954, entitled "Manufacture of Super Fine Organic Fibers" by Van A. Went et al.

The resin used to form the melt blown microfibers is a thermoplastic
25 nonconductive, i.e., having a resistivity greater than 10^{14} ohm*cm, resin capable of having a high quantity of trapped charge. Preferred resins include polypropylene, poly(4-methyl-1-pentene) and blends thereof. The resin should be substantially free from materials such as antistatic agents which could increase the electrical conductivity or otherwise interfere with the ability of the
30 fibers to accept and hold electrostatic charges. The melt blown microfibers can be of a single resin, formed of a resin blend, e.g., polypropylene and poly(4-

methyl-1-pentene), or formed of two resins in layered or core/sheath configurations. When polypropylene and poly(4-methyl-1-pentene) are used in layered or core/sheath configurations, the poly(4-methyl-1-pentene) is preferably on the outer surface.

5 Blown microfibers for fibrous electret filters of the invention typically have an effective fiber diameter of from about 3 to 30 micrometers preferably from about 7 to 15 micrometers, as calculated according to the method set forth in Davies, C.N., "The Separation of Airborne Dust and Particles," Institution of Mechanical Engineers, London, Proceedings 1B, 1952.

10 Staple fibers may also be present in the web. The presence of staple fibers generally provides a more lofty, less dense web than a web of only blown microfibers. Preferably, no more than about 90 weight percent staple fibers are present, more preferably no more than about 70 weight percent. Such webs containing staple fiber are disclosed in U.S. Pat. No. 4,118,531
15 (Hauser).

Sorbent particulate material such as activated carbon or alumina may also be included in the web. Such particles may be present in amounts up to about 80 volume percent of the contents of the web. Such particle-loaded webs are described, for example, in U.S. Pat. No. 3,971,373 (Braun), U.S. Pat. No.
20 4,100,324 (Anderson) and U.S. Pat. No. 4,429,001 (Kolpin et al.).

The electret filter media prepared according to the method of the present invention preferably has a basis weight in the range of about 10 to 500 g/m², more preferably about 10 to 100 g/m². In making melt-blown microfiber webs, the basis weight can be controlled, for example, by changing either the
25 collector speed or the die throughput. The thickness of the filter media is preferably about 0.25 to 20 mm, more preferably about 0.5 to 2 mm. The electret filter media and the polypropylene resin from which it is produced should not be subjected to any unnecessary treatment which might increase its electrical conductivity, e.g., exposure to gamma rays, ultraviolet irradiation,
30 pyrolysis, oxidation, etc.

Nonwoven microfiber webs useful in the present invention may be prepared using an apparatus as shown in FIG. 1. Such an apparatus includes a die 20 which has an extrusion chamber 21 through which liquified fiber-forming material is advanced; die orifices 22 arranged in line across the forward end of the die and through which the fiber-forming material is extruded; and cooperating gas orifices 23 through which a gas, typically heated air, is forced at high velocity. The high velocity gaseous stream draws out and attenuates the extruded fiber-forming material, whereupon the fiber-forming material solidifies as microfibers during travel to a collector 24 to form web 25.

When staple fibers are present in the web, they may be introduced through use of a lickerin roll 32 disposed above the microfiber blowing apparatus as shown in FIG. 1. A web 27 of staple fibers, typically a loose, nonwoven web such as prepared on a garnet or RANDO-WEBBER apparatus, is propelled along table 28 under drive roll 29 where the leading edge engages against the lickerin roll 32. The lickerin roll 32 picks off fibers from the leading edge of web 27 separating the fibers from one another. The picked fibers are conveyed in an air stream through an inclined trough or duct 30 and into the stream of blown microfibers where they become mixed with the blown microfibers.

When particulate matter is to be introduced into the web it may be added using a loading mechanism similar to duct 30.

Hydrocharging of the web is carried out by impinging jets of water or a stream of water droplets onto the web at a pressure sufficient to provide the web with filtration enhancing electret charge. The pressure necessary to achieve optimum results will vary depending on the type of sprayer used, the type of polymer from which the web is formed, the thickness and density of the web and whether pretreatment such as corona charging was carried out prior to hydrocharging. Generally, pressures in the range of about 10 to 500 psi (69 to 3450 kPa) are suitable. Preferably the water used to provide the water droplets is relatively pure. Distilled or deionized water is preferable to tap water.

The jets of water or stream of water droplets can be provided by any suitable spray means. Those apparatus useful for hydraulically entangling fibers are generally useful in the method of the present invention, although operation is carried out at lower pressures in hydrocharging than generally used
5 in hydroentangling.

An example of a suitable spray means is shown in FIG. 2 where fibrous web 10 is transported on support means 11. The transport means may be in the form of a belt, preferably porous, such as a mesh screen or fabric. Water jets 12 in water jet head 13 provide the water spray with a pump (not shown)
10 providing the water pressure. Water jets 12 impinge on web 10 at impingement points 12'. Preferably, a vacuum is provided beneath a porous support to aid in passage of the spray through the web and to reduce drying energy requirements.

Further examples of spray means suitable for use in the method of the
15 present invention include nebulizers such as that shown in FIG. 3 wherein water provided through water line 14 and pressurized air provided through air line 15 are supplied to a nozzle 16 to provide a spray mist to impact web 10 and pump action sprayers such as that shown in FIG. 4 where a pump handle 17 forces water provided by water supply means 18 through nozzle 19 to provide a spray
20 mist.

In the following examples, all percentages and parts are by weight unless otherwise noted. The following test method was used to evaluate the examples.

25 DOP Penetration and Pressure Drop

Diethyl phthalate (DOP) 0.3 micrometer diameter particles at a concentration of between 70 and 110 mg/m³ are generated using a TSI No. 212 sprayer with four orifices and 30 psi (207 kPa) clean air. The particles are forced through a sample of filter media which is 11.45 cm in diameter at a rate
30 of 42.5 L/min, which is a face velocity of 6.9 centimeters per second. The sample was exposed to the aerosol for 30 seconds. The penetration is measured

with an optical scattering chamber, Percent Penetration Meter Model TPA-8F available from Air Techniques Inc. The DOP penetration is preferably less than about 70%, more preferably less than about 40%. The pressure drop is measured at a flow rate of 42.5 L/min and a face velocity of 6.9 cm/sec using
 5 an electronic manometer. Pressure drop is reported as ΔP in mm of water. Preferably the pressure drop is less than about 4 mm of water, more preferably less than about 3 mm of water for a single layer of web.

The penetration and pressure drop are used to calculate a quality factor "QF value" from the natural log (ln) of the DOP penetration by the following
 10 formula:

$$QF[1/\text{mm H}_2\text{O}] = \frac{-\text{Ln} \left[\frac{\text{DOP Penetration (\%)}}{100} \right]}{\text{Pressure Drop [mm H}_2\text{O]}}$$

15 A higher initial QF value indicates better initial filtration performance. Decreased QF values effectively correlate with decreased filtration performance. Generally a QF value of at least about 0.25 is preferred, a value of at least about 0.5 is more preferred and a value of at least about 1 is most
 20 preferred.

Cigarette Smoke Adsorption Test

The cigarette smoke adsorption test was performed in a test chamber having rectangular dimensions with a volume of 1 m³ which contained an
 25 aspirator (CAM 770 Room Air Cleaner, Norelco Company) fitted with a flat filter sample (14 cm x 14 cm). A smoker device capable of smoking a predetermined number of cigarettes (1-10) emitted smoke within the test chamber during a controlled burn time of 4 to 5 minutes. A fan provided uniform mixing of the cigarette smoke generated within the test chamber. A
 30 laser particle counter (Model PMS LAS-X from Particle Measurement System, Colorado) having a sampling flow rate of 5 cc/sec and a detection range of 0.1 to 7.5 micrometer particle size monitored the particle concentration per count within the test chamber environment. The particle trapping efficiency and the

pressure drop of the filter samples were measured before and after the adsorption of the cigarette smoke.

The particle trapping efficiency of the filter media was measured using a TSI AFT-8110 automated filter tester (TSI, St. Paul, MN) with NaCl particles
5 and a face velocity of air passing through the sample of 26.7 cm/sec. The concentration of the NaCl particles, C_{in} and C_{out} , at positions upstream and downstream, respectively, of the filter samples were measured using the photometer in the TSI AFT-8110 and the particle trapping efficiency, E , of the filter was calculated using the formula:

10
$$E = (1 - [C_{out} / C_{in}]) \times 100\%.$$

Ambient Air Particle Loading Test

Filter samples were subjected to ambient air at a flow rate of 149 ft³/min (250 m³/hr) for extended periods of time using samples 300 mm x 116 mm and then challenged with particles of 0.3 micrometers and 1.0 micrometers in size.

15 The resultant particle trapping efficiencies were measured as described in the cigarette smoke adsorption test both prior to the challenge and after designated ambient air loading times.

Examples 1-7 and Comparative Examples C1-C2

A polypropylene (ESCORENE 3505G, available from Exxon Corp.) microfiber web was prepared as described in Wentz, Van A., "Superfine Thermoplastic Fibers," Industrial Engineering Chemistry, vol. 48, pp. 1342-1346. The web had a basis weight of 55 g/m² and a thickness of 0.1 cm. The effective fiber diameter of the fibers was 7.6 μ m. Samples of the web were subjected to impingement of water jets provided by a hydroentangler (Laboratory Model, serial no. 101, available from Honeycomb Systems Corp.), similar to that shown in FIG. 1, which had a spray bar width of 24 in (0.6 m) with 40 spray orifices, each 0.005 in (0.13 mm) in diameter, per inch (2.5 cm) width at various water pressures as set forth in Table 1. Each sample passed beneath the spray bar at a rate of 3.5 m/min, and was treated once on each face, vacuum extracted and dried at 70°C for one hour. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 1.

Table 1

	<u>Example</u>	<u>Pressure</u> <u>(kPa)</u>	<u>Pen</u> <u>(%)</u>	<u>QF</u>
20	C1	34.5	78	0.09
	C2	69	72	0.11
	1	172	39	0.31
	2	345	32	0.37
	3	690	35	0.34
25	4	1380	39	0.34
	5	2070	43	0.34
	6	2760	46	0.31
	7	3450	46	0.34

As can be seen from the data in Table 1, hydrocharging (at pressures of at least about 170 kPa) develops useful levels of electret enhanced filtration characteristics in this web.

Examples 8-15 and Comparative Examples C3-C4

A web was prepared as in Examples 1-7 and subjected to corona treatment by passing the web, in contact with an aluminum ground plane, under a positive DC corona twice at a rate of 1.2 m/min with the current maintained at about 0.01 mA/cm corona source and the corona source was about 4 cm from the ground plate. Samples of this web were then subjected to impingement of water jets as in Examples 1-7 at various pressures as set forth in Table 2. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 2.

Table 2

	<u>Example</u>	<u>Pressure</u> <u>(kPa)</u>	<u>Pen</u> <u>(%)</u>	<u>QF</u>
15	C3	0	27	0.38
	C4	69	21	0.46
	8	172	16	0.55
	9	345	15	0.57
20	10	690	15	0.61
	11	1380	15	0.66
	12	2070	13	0.80
	13	2760	14	0.79
	14	3450	18	0.75
25	15	4140	25	0.61

As can be seen from the data in Table 2, hydrocharging (at pressures greater than about 170 kPa) increased the electret filtration characteristics of this web.

Examples 16-21 and Comparative Example C5

A web was prepared as in Examples 1-7 except the polymer used was poly-4-methyl-1-pentene (TPX MX-007, available from Mitsui Chemical Co. The web was subjected to corona treatment as in Examples 8-15. In Examples 16-21, samples of this web were then subjected to impingement of water droplets as in Examples 1-7 at various pressures as set forth in Table 3. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 3.

10

Table 3

	<u>Example</u>	<u>Pressure</u> <u>(kPa)</u>	<u>Pen</u> <u>(%)</u>	<u>QF</u>
15	C5	0	19	0.85
	16	69	11	1.31
	17	172	2.1	2.06
	18	345	2.0	2.06
	19	1035	2.9	1.97
20	20	1380	3.1	1.75
	21	2760	11	1.12

As can be seen from the data in Table 3, hydrocharging poly-4-methyl-1-pentene webs at pressures of about 69 kPa and greater produced webs having excellent electret enhanced filtration characteristics.

25

Examples 22-24 and Comparative Examples C6-C8

In Examples 22-24 and Comparative Examples C6-C8, polypropylene (SCORENE 3505G) microfiber webs containing 50 weight percent staple fiber were prepared as described in U.S. Pat. No. 4,118,531 (Hauser). Each web weighed about 50 g/m². In Example 22 and Comparative Example C6, the staple fiber was 17 denier, 5.1 cm long polypropylene, natural, available from

30

Synthetic Industries (17d PP); in Example 23 and Comparative Example C7, the staple fiber was 15 denier, 3.1 cm polyester, KODEL K-431 available from Eastman Chemical Company (15d PET); and in Example 24 and Comparative Example C8, the staple fiber was 6 denier, 5.1 cm polyester, KODEL K-211 available from Eastman Chemical Company (6d PET). Prior to use, the polyester staple fibers were washed to remove surface finish using about 2 weight percent LIQUINOX (available from Alconox, Inc.) in hot water (about 140°F, 60°C) with agitation for about 5 minutes, rinsed and dried.

Samples of each web were subjected to corona treatment as described in Examples 8-15. In Examples 22-24, the webs were subsequently subjected to impingement of water spray as in Examples 1-7 at a rate of 3.5 m/min with a hydrostatic pressure of 690 kPa. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 4.

15

Table 4

	<u>Example</u>	<u>Fiber Type</u>	<u>Pen (%)</u>	<u>QF</u>
	22	17d PP	49	1.67
20	23	15d PET	44	2.24
	24	6d PET	47	1.82
	C6	17d PP	68	0.95
	C7	15d PET	72	0.97
	C8	6d PET	76	0.82

25

As can be seen from the data in Table 4, hydrocharging webs of mixtures of melt blown microfibers and staple fibers after corona treatment increases the Quality Factor when compared to webs treated only with corona charging. The most significant increase was seen in the web containing 50 percent 15 denier polyester staple fiber.

30

Examples 25-26 and Comparative Example C9

A polypropylene web was prepared as in Examples 1-7. The web had a basis weight of 54 g/m² and a thickness of 1.04 mm. The effective fiber diameter was 7.5 μ m. In Comparative Example C9, a sample of the web was corona charged as in Examples 8-15. In Example 25, a sample was hydrocharged using a nebulizer (Model SCD 052H, available from Sonic Development Corp., resonator cap removed) with an air pressure of 380 to 414 kPa and water at atmospheric pressure at a distance of about 7 to 12 cm on each side. In Example 26, a sample was corona charged as in Comparative Example C9 and then hydrocharged as in Example 25. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 5.

Table 5

15

<u>Example</u>	<u>Pen (%)</u>	<u>QF</u>
C9	25	0.56
25	45.5	0.36
26	21	0.67

20

As can be seen from the data in Table 5, hydrocharging this web with the nebulizer (Example 25) provided enhanced filtration characteristics although the Quality Factor was not as high as that charged only with corona charging (Comparative Example C9). Hydrocharging with the nebulizer after corona treatment provided the highest Quality Factor in the examples in Table 5.

25

Example 27 and Comparative Example C10

A web was prepared as in Examples 1-7 except the polymer used was a pellet blend of 75% polypropylene (FINA 3860X, available from Fina Oil & Chemical Co.) and 25% poly(4-methyl-1-pentene) (TPX MX-007, available from Mitsui Chemical Co.). The web was 1.0 mm thick and had a basis

30

weight of 55 g/m². The effective fiber diameter was 8.1 μ m. In Example 27, a sample of the web was subjected to corona treatment and then to impingement of jets of water as in Examples 8-15 using water pressure of 345 kPa (50 psi). In Comparative Example C10, a sample was subjected to only corona treatment. The treated samples were tested for DOP penetration and pressure drop and the quality factor was calculated. The penetration (Pen) and quality factor (QF) are reported in Table 6.

Table 6

<u>Example</u>	<u>Pen</u> <u>(%)</u>	<u>QF</u>
27	6.8	1.16
C10	29	0.51

As can be seen from the data in Table 6, hydrocharging significantly enhanced the filtration characteristics of the web of Example 27 over that of the web of Comparative Example C10 which was only corona charged.

Example 28

A polypropylene/poly(4-methyl-1-pentene) multilayer microfiber was prepared as in Examples 1-7 except the apparatus utilized two extruders and a three-layer feedblock (splitter assembly) following the method for forming microfiber webs having layered fibers as described in U.S. Pat. No. 5,207,970 (Joseph et al.). The first extruder delivered a melt stream of a 50 melt flow rate polypropylene resin, available from FINA Oil and Chemical Co., to the feedblock assembly which heated the resin to about 320°C. The second extruder, which heated the resin to about 343°C, delivered a melt stream of poly(4-methyl-1-pentene) supplied as TPX[®] grade MX-007 by Mitsui Petrochemical Industries, Ltd. to the feedblock. The feedblock split the two polymer streams. The polymer melt streams were merged in an alternating fashion into a three-layer melt stream on exiting the feedblock, with the outer layers being the poly(4-methyl-1-pentene) resin. The gear pumps were adjusted

so that a 75:25 pump ratio of polypropylene:poly(4-methyl-1-pentene) polymer melt was delivered to the feedblock assembly. Webs were collected at a collector to die distance of 28 cm (11 in.). The resulting web of three-layer microfibers had an effective fiber diameter of less than about 8 micrometers and
5 a basis weight of 55 g/m². The web was subjected to corona treatment as described in Examples 8-15, then, to impingement of water as described in Examples 1-7 using a water pressure of 345 kPa. The web was then subjected to vacuum extraction and dried at 70°C for one hour. The pressure drop and penetration were measured on the web before impingement of water jets
10 (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 7.

Example 29

15 A web having a basis weight of 55 g/m² and comprising three-layer microfibers having an effective fiber diameter less than about 8 micrometers was prepared as in Example 28, except the polypropylene and the poly(4-methyl-1-pentene) melt streams were delivered to the three-layer feedblock at a 50:50 ratio and the collector to die distance was 23 cm (9 inches). The
20 resulting web was corona treated and subsequently subjected to impingement of water jets and dried as in Example 28. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table
25 7.

Example 30

A web having a basis weight of 55 g/m² and comprising three-layer microfibers having an effective fiber diameter less than about 8 micrometers
30 was prepared as in Example 28, except the polypropylene and poly(4-methyl-1-pentene) melt streams were delivered to the three-layer feedblock in a 25:75

ratio and the collector to die distance was 7.5 inches (19 cm). The resulting web was corona treated and subsequently subjected to impingement of water jets and dried as in Example 28. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 7.

Example 31

A web of the poly(4-methyl-1-pentene) was prepared as in Example 28, except only one extruder, which heated the resin to 343°C, was used. The extruder was connected directly to the die through a gear pump. The collector distance from the die was 19 cm (7.5 inches). The resulting web having an effective fiber diameter of 8.5 micrometers and a basis weight of 55 g/m² was corona treated and subsequently subjected to impingement of water jets and dried as in Example 28. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 7.

Example 32

A web having a basis weight of 55 g/m² and comprising three-layer microfibers having an effective fiber diameter less than about 8 micrometers was prepared as in Example 28, except the second extruder delivered a melt stream of a pellet blend of 50 melt flow polypropylene resin, available from FINA, and poly(4-methyl-1-pentene) resin (Mitsui "TPX" grade MX-007) to the feedblock. The polymer melt streams were merged in an alternating fashion into a three layer melt stream, with the outer layers being pellet blend (75 weight percent polypropylene:25 weight percent poly(4-methyl-1-pentene)). The gear pumps were adjusted to deliver a 50:50 weight ratio of polypropylene:pellet blend polymer melt to the feed block assembly. The

collector distance from the die was 19 cm (7.5 in). The resulting web was corona treated and subsequently subjected to impingement of water jets and dried as per Example 28 treatment. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 7.

Table 7

<u>Example</u>	<u>Pen % Corona Only</u>	<u>QF Corona Only</u>	<u>Pen % Corona + Water Jet Impingement</u>	<u>QF Corona + Water Jet Impingement</u>
28	19.7	0.75	3.7	1.45
29	15.4	0.8	6.3	1.30
30	15.6	0.9	4.8	1.49
31	19.4	0.73	2.5	1.52
32	39.0	0.42	9.1	1.2

As can be seen from the data in Table 7, the webs containing fibers having outer layers of, or containing poly(4-methyl-1-pentene), showed excellent levels of enhanced filtration characteristics when subjected to both corona treatment and impingement of water jets.

Example 33

A web having a basis weight of 63 g/m² and comprising five-layer microfibers having an effective fiber diameter of less than about 10 micrometers was prepared as in Example 28 except that the polypropylene and poly(4-methyl-1-pentene) melt streams were delivered to the five-layer feedblock in a 50:50 weight ratio. The polymer melt streams were merged in an alternating fashion into a five-layer melt stream on exiting the feedblock, with the outer

layers being the poly(4-methyl-1-pentene) resin. The resultant web was subjected to corona treatment by passing the web, in contact with an aluminum ground plate, under six positive DC corona sources, sequentially at a rate of 7 m/min with the current maintained at about 0.05 mA/cm and the corona source was about 7 cm from the ground plate. The corona treated web was then subjected to impingement of water jets as in Example 28 except the water pressure was 690 kPa. The web was vacuum extracted and dried in a through-air drier at 82°C for about 45 seconds. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 8.

Example 34

A web having a basis weight of 62 g/m² and comprising five-layer microfibers having an effective fiber diameter less than about 10 micrometers was prepared as in Example 28, except only one extruder, which heated the resin to 340°C was used. The extruder delivered a melt stream of a pellet blend containing 50 weight percent 50 melt flow polypropylene resin and 50 weight percent poly(4-methyl-1-pentene) (Mitsui "TPX" grade MX-007) to the feedblock. The resulting web was corona treated and also subsequently subjected to impingement of water jets and dried as in Example 33. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 8.

Example 35

A web having a basis weight of 62 g/m² and comprising five-layer microfibers having an effective fiber diameter of less than about 10 micrometers was prepared as in Example 33 except the second extruder delivered a melt

stream of a poly(4-methyl-1-pentene) supplied as "TPX" grade DX820 by Mitsui Petrochemical Industries, Ltd., to the feedblock. The polymer melt streams were merged in an alternating fashion into a five layer melt stream, with the outer layers being poly(4-methyl-1-pentene). The gear pumps were
5 adjusted to deliver a 50:50 weight ratio of the polypropylene:poly(4-methyl-1-pentene) polymer melt to the feed block assembly. The resulting web was corona treated and also subsequently subjected to impingement of water jets and dried as in Example 33. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment only) and after both
10 corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 8.

Example 36

A web having a basis weight of 59 g/m² and comprising five-layer
15 microfibers having an effective fiber diameter of less than about 10 micrometers was prepared as in Example 28 except the second extruder delivered a melt stream of a pellet blend of 80 weight percent 50 melt flow polypropylene resin and 20 weight percent poly(4-methyl-1-pentene) (Mitsui "TPX" grade MX-007) to the feedblock. The polymer melt streams were merged in an alternating
20 fashion into a five layer melt stream, with the outer layers being the pellet blend. The gear pumps were adjusted to deliver a 50:50 weight ratio of the polypropylene:pellet blend polymer melt to the feed block assembly. The resulting web was corona treated and also subsequently subjected to impingement of water jets and dried as in Example 33. The pressure drop and
25 penetration were measured on webs before impingement of water jets (corona treatment only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 8.

Example 37

A web of poly(4-methyl-1-pentene) (Mitsui "TPX" grade MX-007) was prepared utilizing a five layer melt stream as in Example 28, except only one extruder which heated the resin to 343°C, was used. The extruder was
 5 connected directly to the die through a gear pump. The resulting web was corona treated and subsequently subjected to impingement of water jets and dried as in Example 33. The basis weight was 65 g/m² and the effective fiber diameter was less than 10 micrometers. The pressure drop and penetration were measured on webs before impingement of water jets (corona treatment
 10 only) and after both corona treatment and impingement with water jets and the quality factor was calculated. The penetration and quality factor are reported in Table 8.

Table 8

15	<u>Example</u>	Pen % <u>Corona Only</u>	QF <u>Corona Only</u>	Pen % Corona + Water Jet <u>Impingement</u>	QF Corona + Water Jet <u>Impingement</u>
	33	26.7	0.66	7.8	1.31
	34	28.7	0.49	11.8	0.94
20	35	25.8	0.55	9.3	1.01
	36	26.4	0.56	13.7	0.9
	37	25.2	0.51	7.1	1.24

Examples 38a-d, 39a-d and 40a-d

25 Circular filter layers 10.16 cm in diameter and 1.3 mm thick were prepared from web materials prepared as described in Example 35 for Examples 38a-d, Example 36 for Examples 39a-d and Example 37 for Examples 40a-d. Circular filter elements were assembled of various numbers of layers, as indicated in Table 9, of charged electret filter media as in U.S.
 30 Pat. No. 4,886,058 (Brostrom et al.) for the front and rear walls of the filter element. Each assembled filter element had a singular, circular polypropylene

breather tube having an inner diameter of 1.91 cm. The filter elements were subjected to the DOP penetration and pressure drop test. The results are reported in Table 9.

5 Examples 41a-e

A web of 50 melt flow polypropylene resin was prepared as in Example 33, except that only one extruder, which heated the resin to 320°C was used, and it was connected directly to the die through a gear pump. The resulting web had a basis weight of 55 g/m² and an effective fiber diameter of less than about 10 8 micrometers. The resulting web was corona treated and also subsequently subjected to impingement of water jets and dried as in Example 33.

Filter elements containing various numbers of layers of the electret web were prepared and tested as in Examples 38-40. The results are set forth in Table 9.

15

Comparative Example C11

A web of 50 melt flow polypropylene resin was prepared as in Example 41 except the resultant web was only corona treated. A filter element using six layers of electret filter media was assembled and tested as in Examples 38-40. 20 The results are set forth in Table 9.

TABLE 9

		Layers of Filter Media per wall	Initial Penetration (%)	Initial Pressure Drop (mm H ₂ O)	Loaded Penetration (%)	Loaded Pressure Drop (mm H ₂ O)
5	Ex.					
	38a	5	0.001	18.5	0.001	18.9
	b	4	0.001	15.4	0.003	15.9
	c	3	0.007	12.4	0.018	12.8
10	d	2	0.161	9.6	0.529	9.8
	39a	5	0.002	17.6	0.006	18.0
	b	4	0.013	13.8	0.032	14.1
	c	3	0.114	11.9	0.294	12.4
15	d	2	0.840	8.9	2.15	9.3
	40a	5	0.001	23.3	0.001	23.8
	b	4	0.001	18.4	0.001	18.9
	c	3	0.080	14.5	0.017	14.9
20	d	2	0.167	10.8	0.311	11.1
	41a	6	0.001	21.4	0.001	21.8
	b	5	0.001	16.7	0.002	17.0
	c	4	0.001	15.0	0.021	15.3
25	d	3	0.007	12.0	0.237	12.4
	e	2	0.177	9.1	3.37	9.4
	C11	6	0.015	17.7	0.127	17.4

30

The data demonstrates that water jet impingement upon a corona treated microfiber filter media of either polypropylene fiber, multilayer fiber construction of polypropylene with poly-4-methyl-1-pentene, and fibers of poly-4-methyl-1-pentene permits less penetration of DOP both initially and at final loading compared with polypropylene microfiber 6-layer construction subjected only to corona treatment. Therefore, filter elements utilizing the water impingement treated microfiber media can be made with fewer layers of media and lower pressure drop across the filter element can result while the filter

element still offers comparable or superior performance levels to corona treated electret filter media having a greater number of layers.

Example 42

5 A filter sample was prepared as in Example 31 except the collector to die distance was 40 cm (16 in), the resin was heated to 372°C, the effective fiber diameter was 14 micrometers, the basis weight was 50 g/m², and the web was dried at 80°C for about 25 min. The pressure drop was measured. The sample was subjected to the cigarette smoke test and filter efficiency was
10 determined. The results are shown in Table 10.

Example 43

A filter was prepared as in Example 42 except TPX™ grade MX-002 poly(4-methyl-1-pentene) was used. The pressure drop was measured. The
15 sample was subjected to the cigarette smoke test and filter efficiency was determined. The results are shown in Table 10.

Table 10

20	<u>Ex.</u>	Pressure drop (mm H ₂ O) at 26.7 <u>cm/sec</u>	Uncharged Filter Efficiency <u>E_{uc} (%)</u>	Initial Filter Efficiency <u>E_i (%)</u>	Filter Efficiency After 1 Cigarette <u>E_r (%)</u>	Filter Efficiency After 5 Cigarettes <u>E_r (%)</u>	Filter Efficiency After 10 Cigarettes <u>E_r (%)</u>
	42	2.8	16.5	80.5	-----	48.8	17.9
25	43	3.4	18.6	67.1	60.3	53.9	34.4

The data in Table 10 illustrates the superior filtration performance of the filters made from poly(4-methyl-1-pentene) and treated by the combination of
30 corona and water impingement.

Examples 44a and 44b

A filter sample was prepared as in Example 31 except the collector to die distance was 11 inches (28 cm) and the effective fiber diameter was 14 micrometers. The web had a basis weight of 40 g/m² and a thickness of 1.2 mm (0.049 in). A pleated filter element was prepared from the filter web and a scrim of Colback® (80 g/m², available from BASF Corp.) which had been adhesively adhered to the filter web using about 1 g/m² adhesive. The filter element was 29 cm long, 10 cm wide and had 52 pleats in its 29 cm length with the pleats having a height of 28 mm. The web was tested for initial efficiency and pressure drop values as well as for the filter efficiency after ambient air particle loading at particle sizes of 0.3 micrometer diameter (Example 44a) and 1 micrometer diameter (Example 44b). The results are shown in Table 11.

Table 11

15						133		
				Initial		Hour		
				Pressure		exposure		290 Hour
				Drop	133 Hour	Pressure	290 Hour	exposure
20		Particle	Initial	(mm	exposure	Drop	exposure	Pressure
	Ex.	Size	Efficiency	H ₂ O)	Efficiency	(mm	Efficiency	Drop
		(um)	(%)		(%)	H ₂ O)	(%)	(mm H ₂ O)
	44a	0.3	70.5	10.8	53.8	13.8	47	15.5
	44b	1.0	86.8	10.8	79.0	13.8	75	15.5

The data in Table 11 demonstrates that the particle trapping efficiency can be sustained for long periods even under conditions of continuous use with a range of particle sizes.

The various modifications and alterations of this invention will be apparent to those skilled in the art without departing from the scope and spirit of this invention and this invention should not be restricted to that set forth herein for illustrative purposes.

What is claimed is:

1. A method of charging a nonwoven web of thermoplastic microfibers to provide electret filter media comprising impinging on a nonwoven web of thermoplastic nonconductive microfibers capable of having a high quantity of trapped charge, jets of water or a stream of water droplets at a pressure
5 sufficient to provide the web with filtration enhancing electret charge and drying said web.
2. The method of claim 1 wherein said jets of water are provided by a hydroentangling device.
3. The method of claim 1 wherein said stream of water droplets is provided by a nebulizer.
4. The method of claim 1 wherein said jets of water or stream of water droplets is provided at a pressure in the range of about 69 to 3450 kPa.
5. The method of claim 1 wherein said web is subjected to corona discharge treatment prior to impingement of said jets of water or said stream of water droplets.
6. The method of claim 1 wherein said web further contains staple fiber.
7. The method of claim 6 wherein said staple fiber comprises up to 90 weight percent of said web.
8. The method of claim 1 wherein said web has a basis weight of about 5 to 500 g/m².

9. The method of claim 1 wherein said web has a thickness of about 0.25 to 20 mm.

10. The method of claim 1 wherein said microfibers have an effective fiber diameter of about 3 to 30 μm .

11. The method of claim 1 wherein said microfibers are polypropylene, poly(4-methyl-1-pentene) or blends thereof.



12. The method of claim 1 wherein said microfibers comprise polypropylene and poly(4-methyl-1-pentene).



13. The method of claim 12 wherein the polypropylene and poly(4-methyl-1-pentene) are layered in said microfibers.

14. Electret filter media comprising a nonwoven web of thermoplastic nonconductive microfibers having trapped charge, said charge provided by (1) impingement of jets of water or a stream of water droplets on the web at a pressure sufficient to provide the web with filtration enhancing electret charge and (2) drying of the web.

15. A resilient cup-shaped filtration face mask adapted to cover the nose and mouth of the wearer of the mask comprising a nonwoven web of thermoplastic nonconductive microfibers having trapped charge, said charge provided by (1) impingement of jets of water or a stream of water droplets on the web at a pressure sufficient to provide the web with filtration enhancing electret charge and (2) drying of the web.

16. A respirator mask assembly comprising a facepiece comprising at least one inhalation port, inhalation valve, and inhalation filter and at least one exhalation port and exhalation valve, a face seal supported by the face piece and a harness for supporting the facepiece on a wearers head, said inhalation filter comprising a nonwoven web of thermoplastic nonconductive microfibers having trapped charge, said charge provided by (1) impingement of jets of water or a stream of water droplets on the web at a pressure sufficient to provide the web with filtration enhancing electret charge and (2) drying of the web.

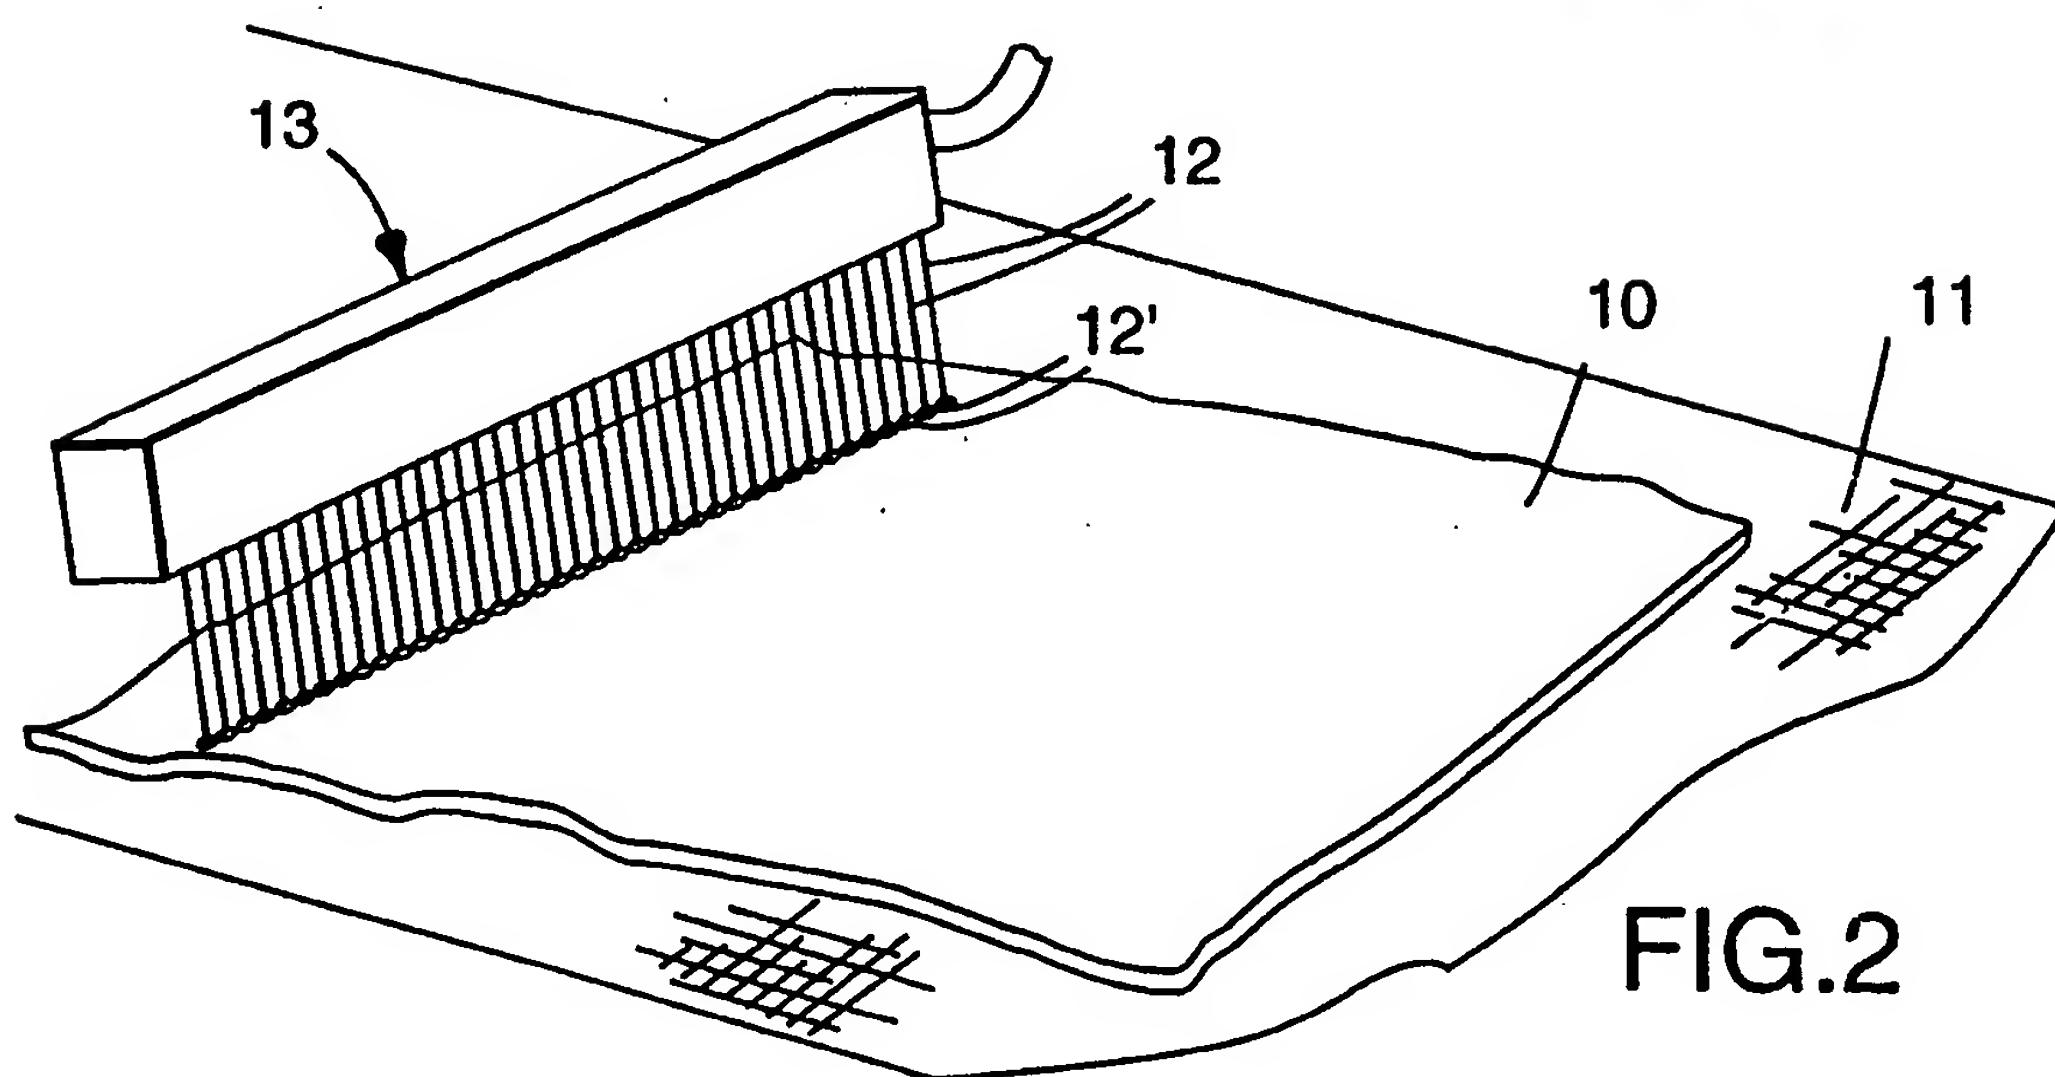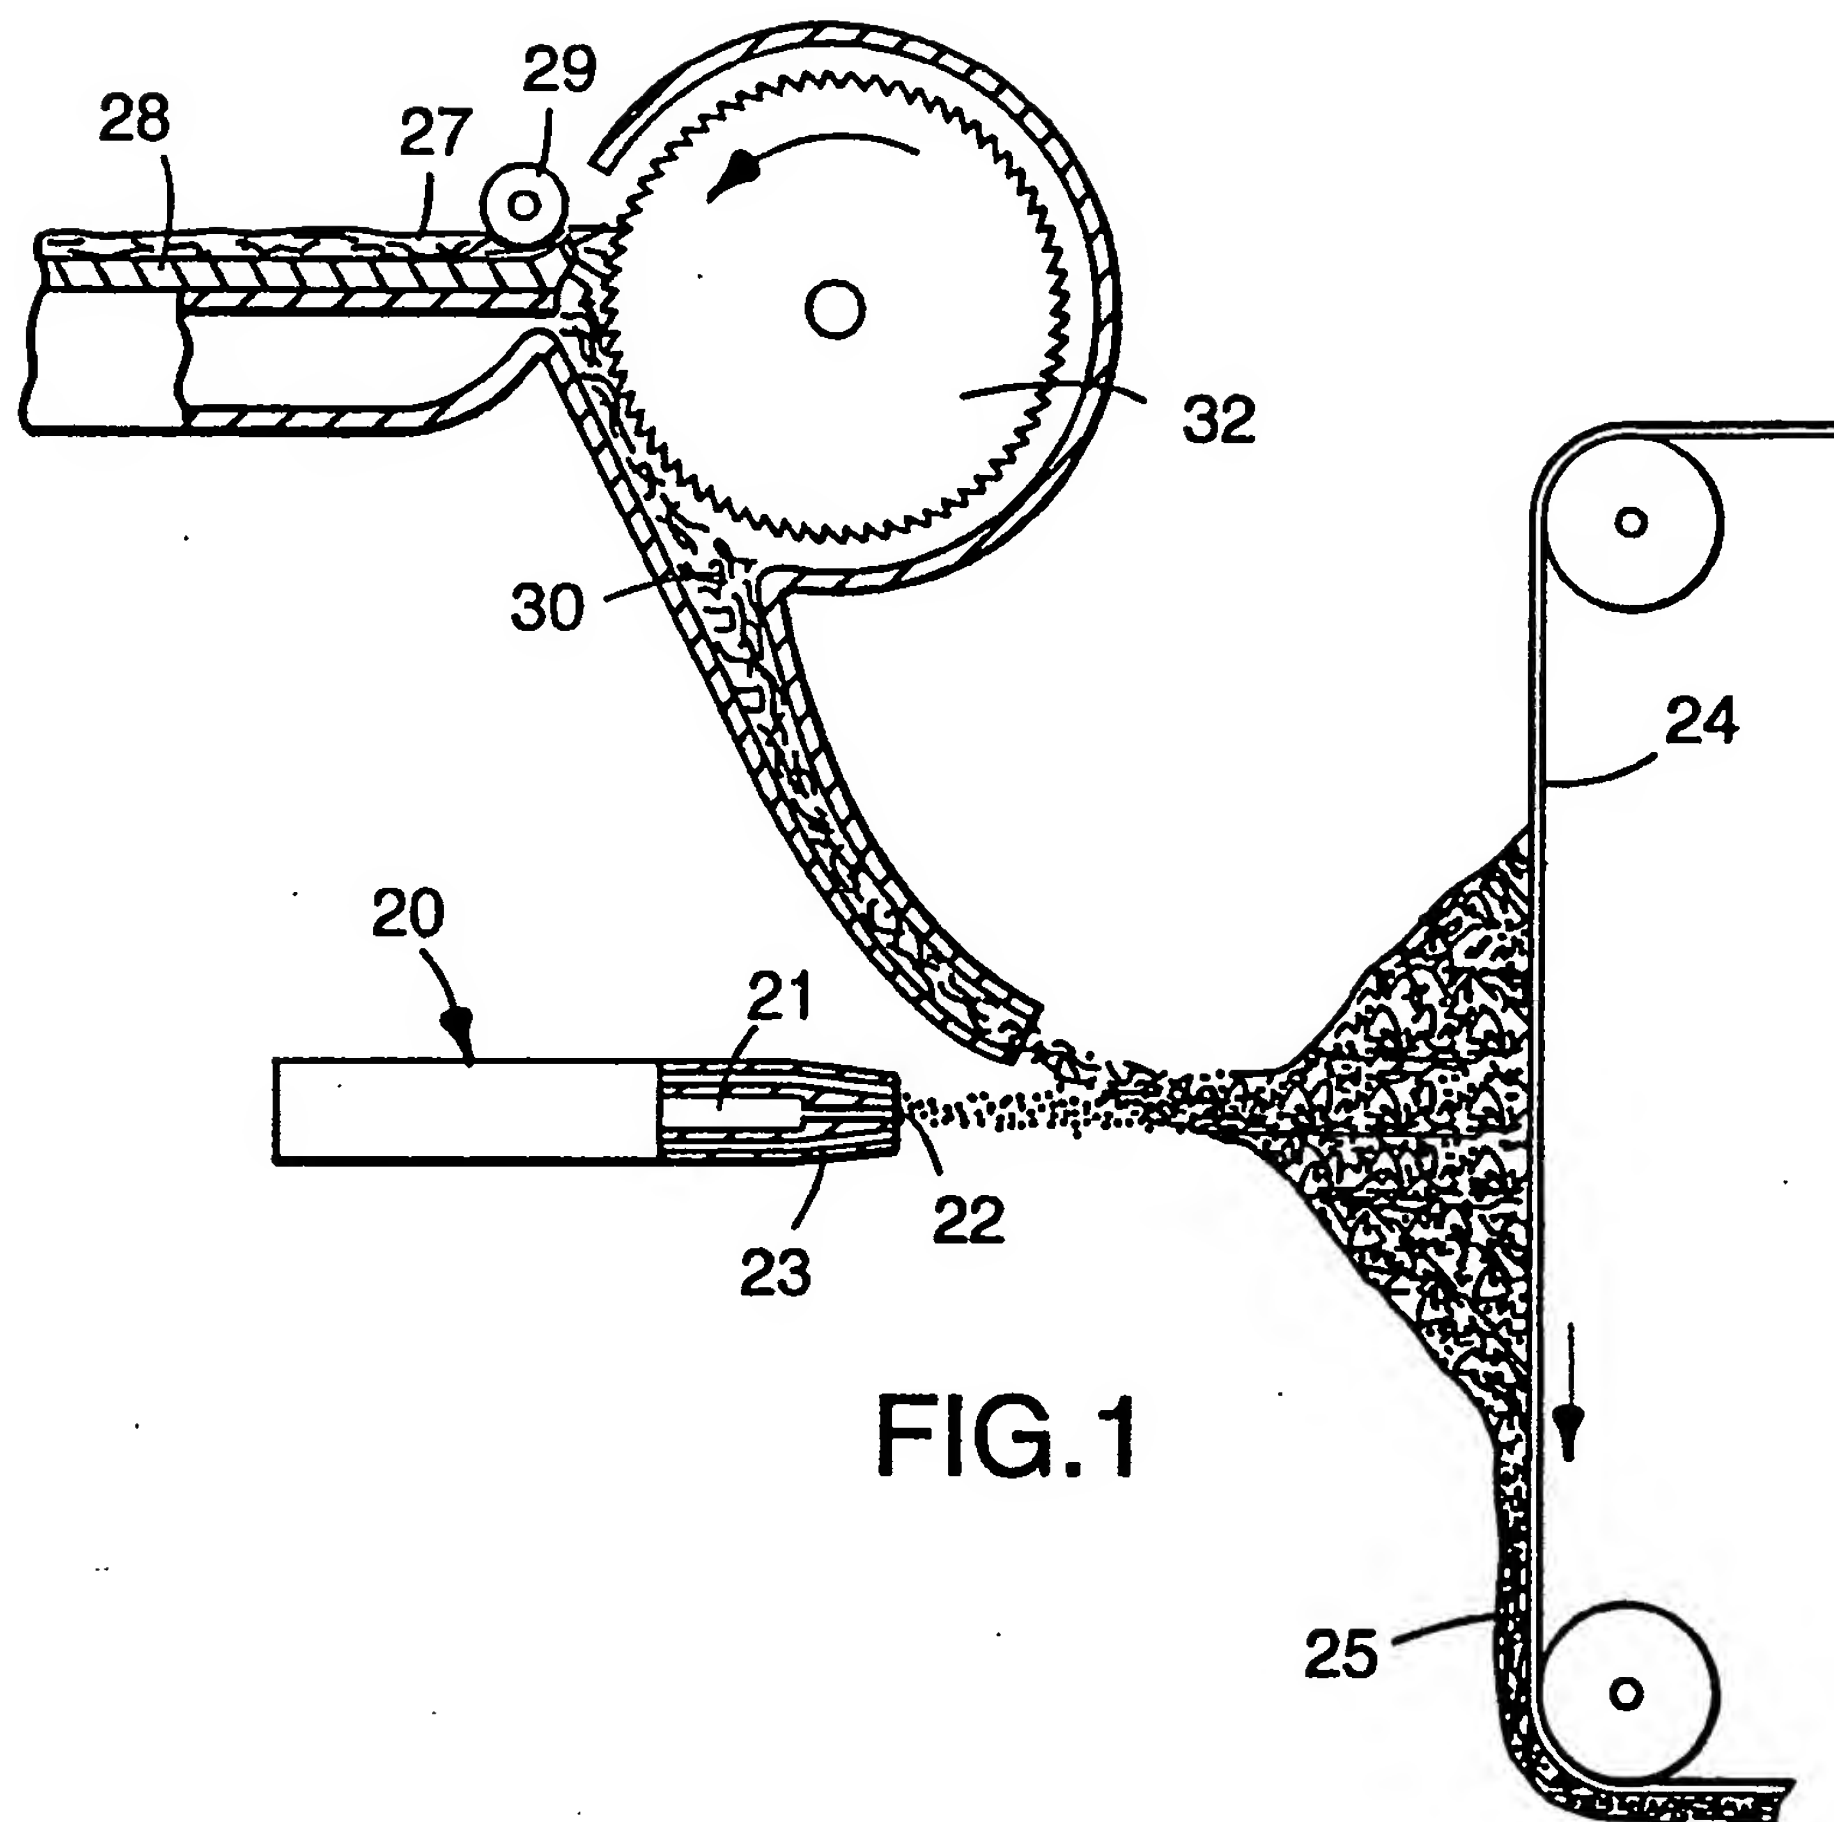

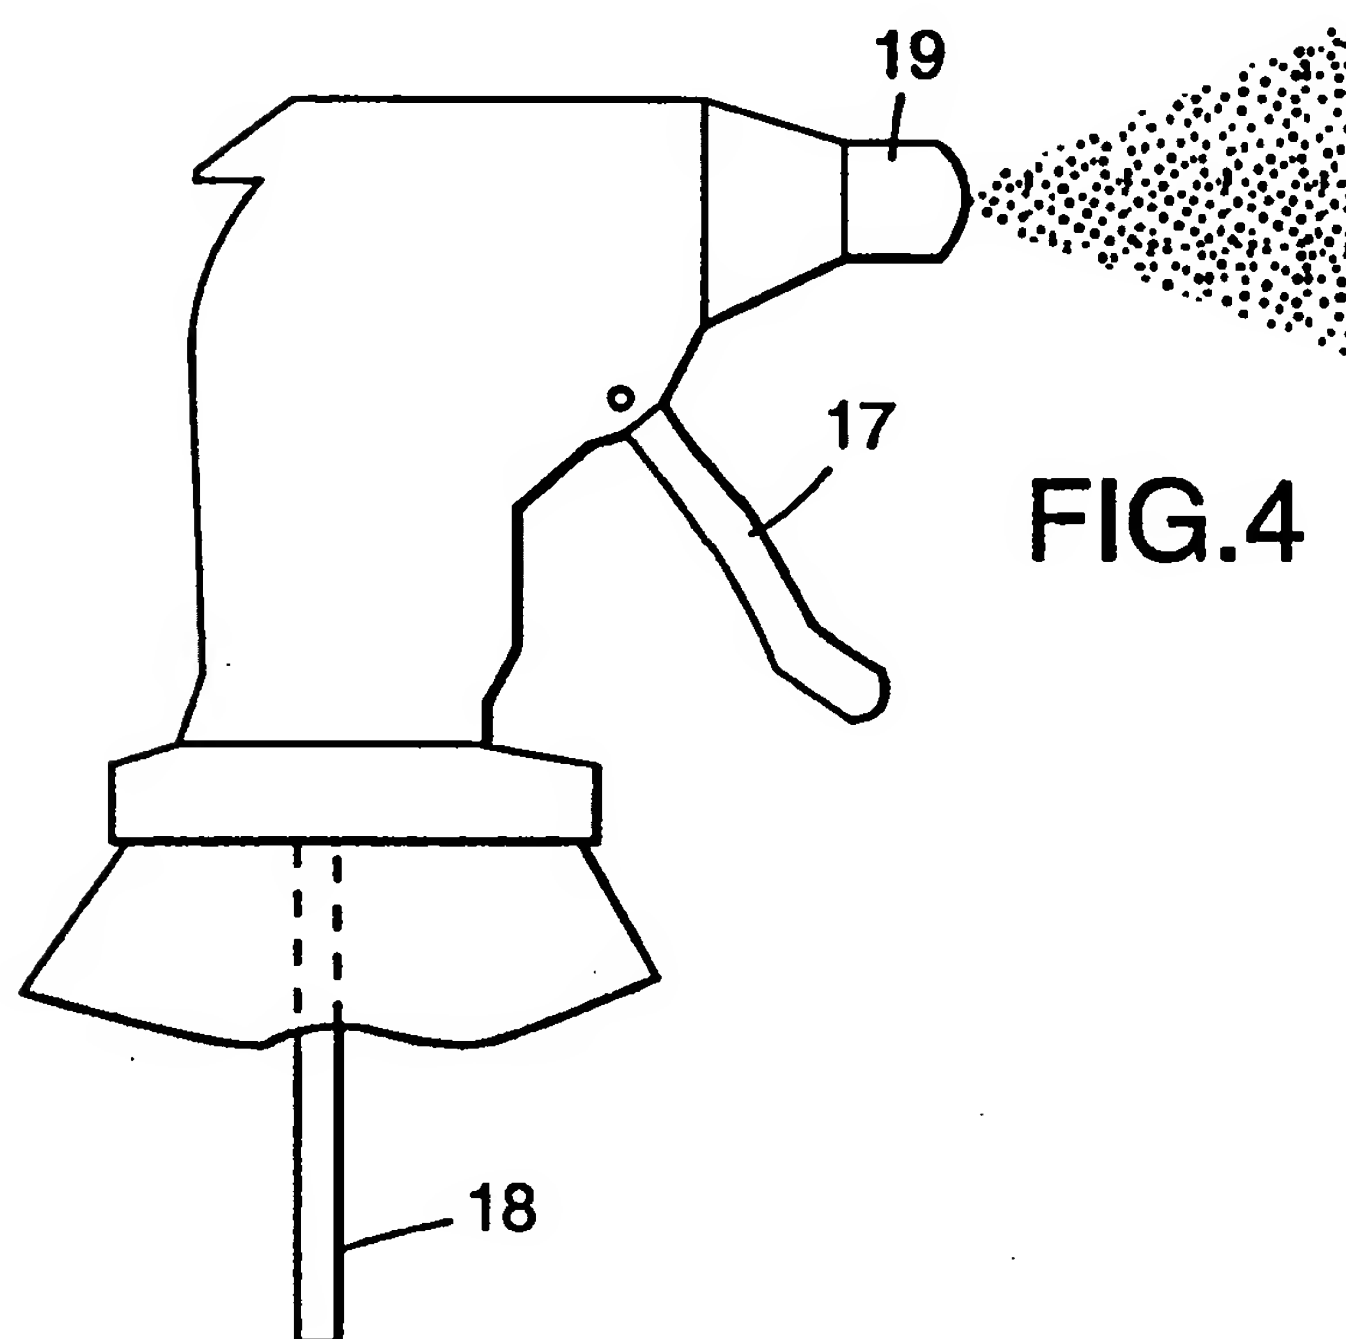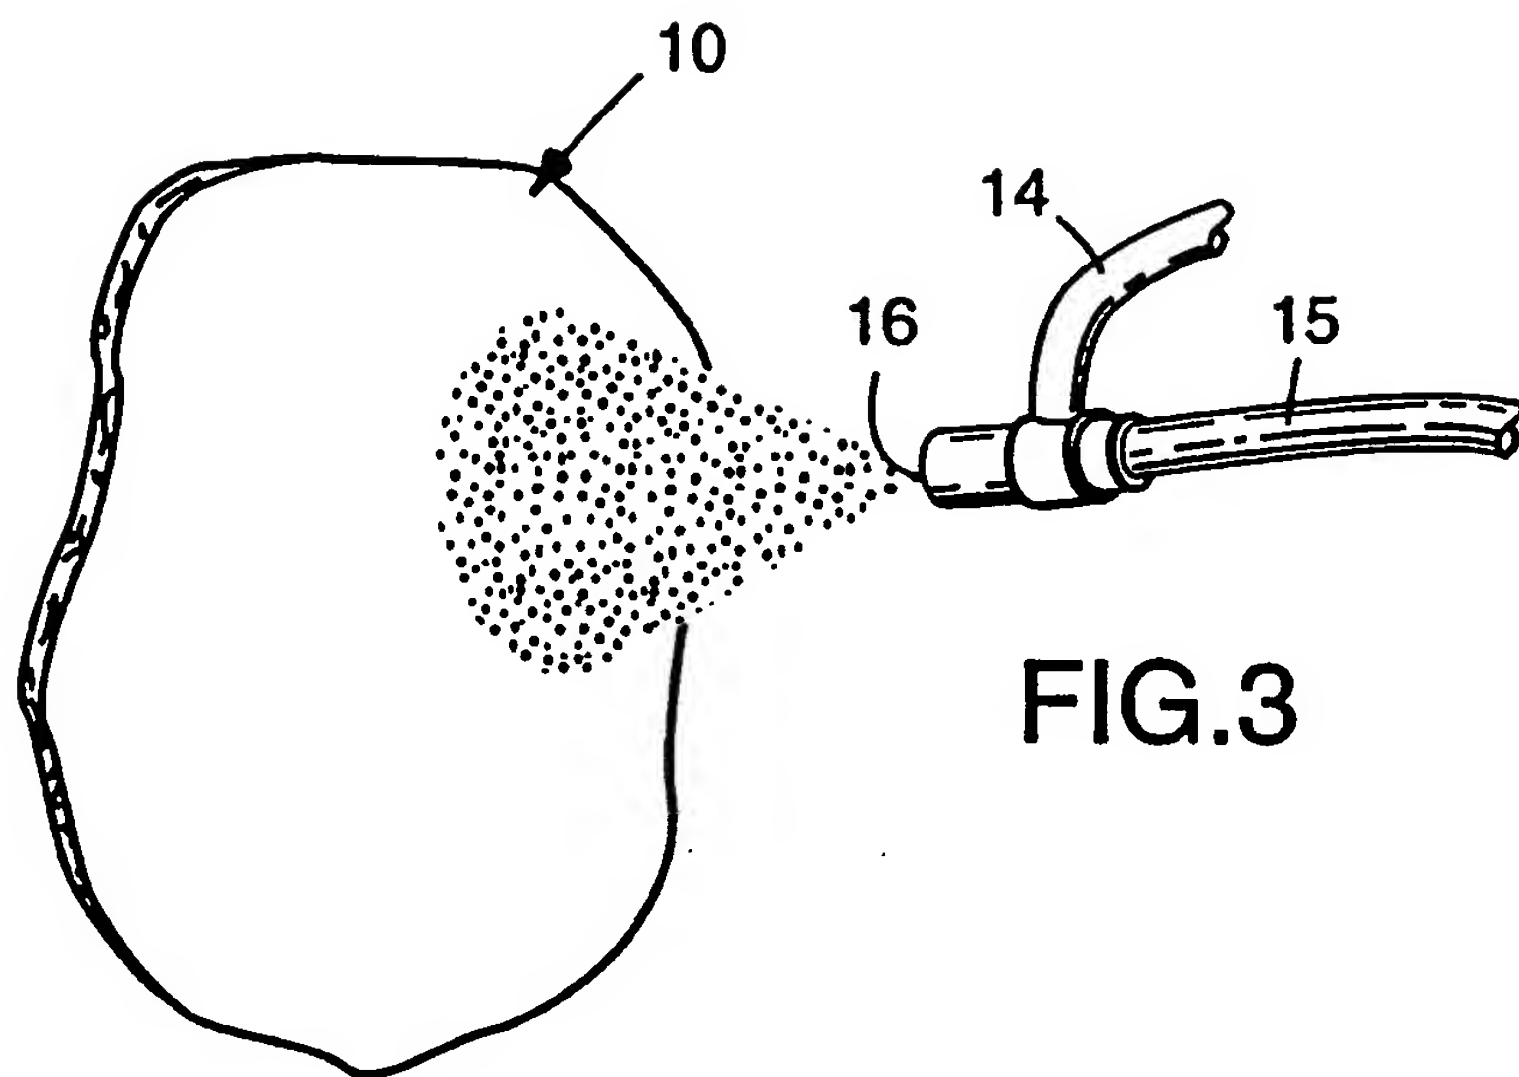

INTERNATIONAL SEARCH REPORT

International Application No

PC/US 94/09275

A. CLASSIFICATION OF SUBJECT MATTER
 IPC 6 D04H1/46 D04H1/42 B01D39/16

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 D04H B01D A41D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 17, no. 523 (C-1113) 21 September 1993 & JP,A,05 140 849 (UNITIKA LTD) 8 June 1993 see abstract ---	1,2,5
A	EP,A,0 325 854 (MINNESOTA MINING AND MANUFACTURING COMPANY) 2 August 1989 see page 3, line 17 - page 4, line 13 ---	11,12
A	EP,A,0 118 216 (MINNESOTA MINING AND MANUFACTURING COMPANY) 12 September 1984 see page 3, line 7 - page 20, line 19 ---	5
A	EP,A,0 428 400 (MINNESOTA MINING AND MANUFACTURING COMPANY) 22 May 1991 see page 3, line 36 - page 10, line 6 ---	6-12
	--- -/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

8 February 1995

Date of mailing of the international search report

22.02.95

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

V Beurden-Hopkins, S

INTERNATIONAL SEARCH REPORT

International Application No

PLI/US 94/09275

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	GB,A,2 176 404 (ODESSKY GOSUDARSTVENNY UNIVERSITET IMENI I.I. MECHNIKOVA (USSR)) 31 December 1986 -----	16

INTERNATIONAL SEARCH REPORT

(information on patent family members)

International Application No

PCT/US 94/09275

Patent document cited in search report	Publication date	Parent family member(s)	Publication date	
EP-A-0325854	02-08-89	US-A-	4874399	17-10-89
		AU-A-	2681588	27-07-89
		DE-A-	3880472	27-05-93
		DE-T-	3880472	21-10-93
		JP-A-	1224020	07-09-89

EP-A-0118216	12-09-84	NL-A-	8300437	03-09-84
		NL-A-	8300439	03-09-84
		AU-B-	565762	24-09-87
		AU-A-	2574984	30-08-84
		CA-A-	1238481	28-06-88
		DE-A-	3473528	22-09-88
		JP-A-	6319924	22-11-94
		JP-B-	5010961	12-02-93
		JP-T-	60500658	09-05-85
		WO-A-	8403193	16-08-84
		US-A-	4588537	13-05-86
		US-A-	4749348	07-06-88

EP-A-0428400	22-05-91	AU-B-	634595	25-02-93
		AU-A-	6558690	23-05-91
		CA-A-	2027687	15-05-91
		JP-A-	3185169	13-08-91
		US-A-	5350620	27-09-94

GB-A-2176404	31-12-86	DE-A, C	3522873	08-01-87
		FR-A, B	2583645	26-12-86
